



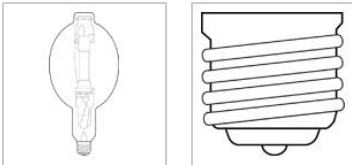

GE
Lighting

39097 - MVR950/I/VBU

GE Multi-Vapor® Quartz Metal Halide BT56

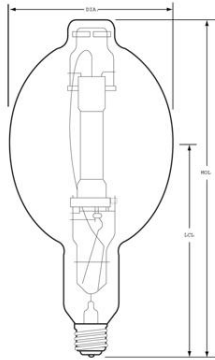

GENERAL CHARACTERISTICS

Lamp Type	High Intensity Discharge - Quartz Metal Halide
Bulb	BT56
Base	Mogul Screw (E39)
Bulb Finish	Clear
Rated Life (NOM)	12000.0 h
Bulb Material	Hard glass
Lamp Enclosure Type (LET)	Open Fixture-Restricted Position (S-Rated)

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	100000.0
Mean Lumens (Vert)	10000.0
Mean Lumens (NOM)	62900.0
Nominal Initial Lumens per Watt (NOM)	105.2632
Color Temperature (NOM)	3800.0 K
Color Rendering Index (CRI) (NOM)	65.0
Effective Arc Length (NOM)	5.98 in

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	950.0
Burn Position	Vertical base up ±15°
Open Circuit Voltage (peak lead ballast) (MIN)	552.0 V
Open Circuit Voltage (RMS lag ballast) (MIN)	390.0 V
Warm Up Time to 90% (MIN)	2.0 min
Warm Up Time to 90% (MAX)	5.0 min
Hot Restart Time to 90% (MIN)	10.0 min
Hot Restart Time to 90% (MAX)	15.0 min

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	15.060 in(382.5 mm)
Nominal Length (NOM)	15.060 in(382.5 mm)
Bulb Diameter (DIA) (NOM)	7.000 in(177.8 mm)
Light Center Length (LCL) (NOM)	9.500 in(241.3 mm)

PRODUCT INFORMATION

Product Code	39097
Description	MVR950/I/VBU
ANSI Code	H36/M47
Standard Package	Case
Standard Package GTIN	10043168390979
Standard Package Quantity	6
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	6
UPC	043168390972

CAUTIONS & WARNINGS

R- WARNING: This lamp can cause serious skin burn and eye inflammation from shortwave ultraviolet radiation if outer envelope of the lamp is broken or punctured, and the arc tube continues to operate. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Certain types of lamps that will automatically extinguish when the outer envelope is broken or punctured are commercially available. Visit the FDA website for more information: <http://www.fda.gov/cdrh/radhealth/products/urburns.html>

Caution

- Lamp may shatter and cause injury if broken
 - Dispose of lamp in a closed container.
 - Do not use excessive force when installing lamp.
 - Do not use lamp if outer glass is scratched or broken.
 - Wear safety glasses and gloves when handling lamp.

Warning

- Unexpected lamp rupture may cause injury, fire, or property damage
 - Do not exceed rated voltage.
 - Do not store flammable materials near/below lamp.
 - Do not turn on lamp until fully installed.
 - Do not use beyond rated life.
 - Do not use lamp if outer glass is scratched or broken.
 - Do not use where directly exposed to water or outdoors without an enclosed fixture.
 - If used on a dimming system, see instructions.
 - Operate lamp only in specified position.
 - Turn lamp off at least once for 15 minutes per week.
 - Use in enclosed fixture rated for this product-- see instructions.
 - Use only properly rated ballast.
- A damaged lamp emits UV radiation which may cause eye/skin injury
 - Turn power off if glass bulb is broken. Remove and dispose of lamp.
- Risk of Burn
 - Allow lamp to cool before handling.
 - Do not turn on lamp until fully installed.
- Risk of Electric Shock
 - Do not use where directly exposed to water or outdoors without an enclosed fixture.
 - Turn power off before inspection, installation or removal.
- Risk of Fire
 - Keep combustible materials away from lamp.
 - Use in fixture rated for this product.

GRAPHS & CHARTS

Graphs_Spectral Power Distribution

For additional information, visit www.gelighting.com

