



GE
Lighting


49895 - FLE14/2TC16BUGCD

GE energy smart® CFL bug light 11 watt Postlight 1-pack

• Designed with a unique all-weather construction, they withstand harsh weather conditions better than regular bulbs.

- Saves \$17.00 in energy costs*
- Lasts 6 times longer than a 40 watt incandescent Bug Lite bulb*
- 40 watt replacement uses only 11 watts
- Estimated yearly energy costs \$1.32 based on 3 hours per day \$0.11 per kWh
- GE energy smart® bug light CFL features a GE Spiral® bulb on the inside that uses 75% less energy and lasts up to 8 times longer than incandescents. These bulbs have a special coating makes light invisible to bugs, so they are not attracted. Use GE energy smart® bug light CFL bulbs in enclosed outdoor fixtures like porch lights, postlights and carriage lights
- Lasts 5.5 years based on 3 hours per day usage
- Postlight with medium base for use in outdoor carriage and post lights
- Yellow light bulb
- Estimated yearly energy costs \$1.32 based on 3 hours per day \$0.11 per kWh

a product of
ecomagination

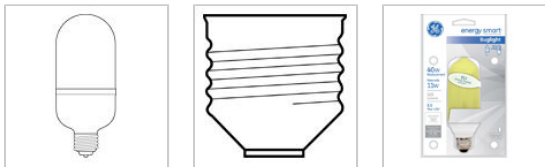

GENERAL CHARACTERISTICS

Lamp Type	Compact Fluorescent - Self-Ballasted
Bulb	TC14
Base	Medium Screw (E26)
Equivalent Wattage (NOM)	40.0 W
Rated Life (NOM)	6000.0 h
Starting Temperature (MIN)	-15.0 °C
Total Harmonic Distortion (THD) (NOM)	120.0 %
Life in Years (NOM)	5.5
Mercury Content (NOM)	3.5 mg
Picograms of Mercury (NOM)	1388.9 pg
Primary Application	Bug Light;Facilities;Retail Display;Hospitality;Office;Restaurant

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	520.0
Mean Lumens (NOM)	420.0
Nominal Initial Lumens per Watt (NOM)	47.27273
Color Temperature (NOM)	2700.0 K
Color Rendering Index (CRI) (NOM)	82.0

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	11.0
Voltage (NOM)	120.0
Input Voltage (NOM)	120.0 V
Estimated Energy Cost per Year (NOM)	1.32
Power Factor (NOM)	0.6

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	5.200 in(132.1 mm)
Nominal Length (NOM)	96.000 in(2438.4 mm)
Bulb Diameter (DIA) (NOM)	1.500 in(38.1 mm)

PRODUCT INFORMATION

Product Code	49895
Description	FLE14/2TC16BUGCD
Standard Package	Case
Standard Package GTIN	30043168498952
Standard Package Quantity	3
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	3
UPC	043168498951

CAUTIONS & WARNINGS

Warning

- Risk of Electric Shock
 - Do not open - no user serviceable parts inside.
 - Do not use where directly exposed to water or outdoors without an enclosed fixture.

*Guaranteed to last 4 years based on 4 hours use per day at 120V. Electricity cost savings based on rated life of 6,000 hrs compared to six 40 watt Bug Lite incandescent bulbs (rated life 1000 hrs). Energy savings based on 10c per kilowatt hour. Reliable starting to 50F (-15oC). Lamp requires a short warm up period to reach full brightness.

NOTES

- Fluorescent lamp lumens decline during life
- Lumens on one piece self ballasted lamp systems are measured base up.
- Use only on 120V 60 Hz circuits. Do not use on dimming circuits, photocells or timers. Do not use in wet locations.