



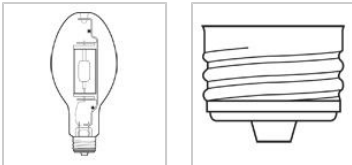

GE
Lighting

20036 - CMH350/C/V/PA/O

GE Protected ConstantColor® CMH® Ceramic Metal Halide ED37

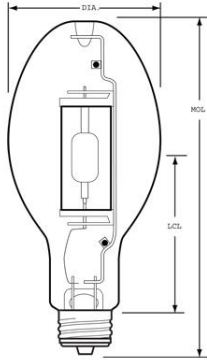

CAUTIONS & WARNINGS

R- WARNING: This lamp can cause serious skin burn and eye inflammation from shortwave ultraviolet radiation if outer envelope of the lamp is broken or punctured, and the arc tube continues to operate. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Certain types of lamps that will automatically extinguish when the outer envelope is broken or punctured are commercially available. Visit the FDA website for more information: <http://www.fda.gov/cdrh/radhealth/products/urburns.html>

Caution

- Lamp may shatter and cause injury if broken
 - Dispose of lamp in a closed container.
 - Do not use excessive force when installing lamp.
 - Do not use lamp if outer glass is scratched or broken.

Warning

- Risk of Burn
 - Allow lamp to cool before handling.
 - Do not turn on lamp until fully installed.
- Risk of Fire
 - Keep combustible materials away from lamp.
 - Use in fixture rated for this product.
- Risk of Electric Shock
 - Do not use where directly exposed to water or outdoors without an enclosed fixture.
 - Turn power off before inspection, installation or removal.
- A damaged lamp emits UV radiation which may cause eye/skin injury
 - Turn power off if glass bulb is broken. Remove and dispose of lamp.
- Unexpected lamp rupture may cause injury, fire, or property damage
 - Do not exceed rated voltage.
 - Do not store flammable materials near/below lamp.
 - Do not turn on lamp until fully installed.
 - Do not use beyond rated life.
 - Do not use lamp if outer glass is scratched or broken.
 - Do not use where directly exposed to water or outdoors without an enclosed fixture.
 - Operate lamp only in specified position.
 - Use only properly rated ballast.

NOTES

- Rated life based on 11 hours per start
- Use with approved ballast, do not use on high frequency electronic ballasts

GENERAL CHARACTERISTICS

Lamp Type	High Intensity Discharge - Ceramic Metal Halide
Bulb	ED37
Base	Mogul Screw (EX39)
Bulb Finish	Coated
Rated Life (NOM)	20000.0 h
Bulb Material	Hard glass
Lamp Enclosure Type (LET)	Open or enclosed fixtures
Base Temperature (MAX)	210.0 °C
Bulb Temperature (MAX)	400.0 °C
Mercury Content (NOM)	45.5 mg
Picograms of Mercury (NOM)	85.9 pg
Additional Info	Ballast thermal protection

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	32000.0
Mean Lumens (NOM)	25600.0
Nominal Initial Lumens per Watt (NOM)	91.42857
Color Temperature (NOM)	4000.0 K
Color Rendering Index (CRI) (NOM)	90.0
Base to Arc Axis Eccentricity (NOM)	3.0 °
Bulb to Base Eccentricity (NOM)	3.0 °

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	350.0
Voltage (NOM)	79.54
Burn Position	Vertical base up +/- 15° or vertical base down +/- 15°
Warm Up Time to 90% (MAX)	3.0 min
Warm Up Time to 90% (NOM)	3.0 min
Hot Restart Time to 90% (NOM)	17.0 min
Current Crest Factor (MAX)	1.8

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	11.500 in(292.1 mm)
Nominal Length (NOM)	11.310 in(287.3 mm)
Bulb Diameter (DIA) (NOM)	4.625 in(117.5 mm)
Light Center Length (LCL) (NOM)	7.000 in(177.8 mm)

PRODUCT INFORMATION

Product Code	20036
Description	CMH350/C/V/PA/O
ANSI Code	No CMH350 ANSI code
Standard Package	Case
Standard Package GTIN	10043168200360
Standard Package Quantity	6
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	6
UPC	043168200363