





GE  
Lighting

16975 - 939

GE T5 - Low Voltage; Emergency Building; Emergency Building Light

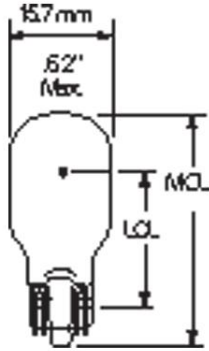

**GENERAL CHARACTERISTICS**

|                     |                                |
|---------------------|--------------------------------|
| Lamp Type           | Miniature - T & TL Shape       |
| Bulb                | T5                             |
| Base                | Wedge (W2.1x9.5d)              |
| Filament            | C-2R                           |
| Rated Life (NOM)    | 50.0 h                         |
| Atmosphere          | Gas-filled                     |
| Primary Application | Emergency Building;Low Voltage |

**PHOTOMETRIC CHARACTERISTICS**

|   |      |
|---|------|
| Initial Lumens (NOM)                    | 68.0 |
| Nominal Initial Lumens per Watt (NOM)   | 13.6 |
| Mean Spherical Candlepower (MSCP) (NOM) | 5.4  |

**ELECTRICAL CHARACTERISTICS**

|               |     |
|---------------|-----|
| Wattage (NOM) | 5.0 |
| Voltage (NOM) | 6.0 |

**DIMENSIONS**

|                                    |                   |
|------------------------------------|-------------------|
| Maximum Overall Length (MOL) (NOM) | 1.490 in(37.8 mm) |
| Bulb Diameter (DIA) (NOM)          | 0.625 in(15.9 mm) |
| Light Center Length (LCL) (NOM)    | 0.810 in(20.6 mm) |

**PRODUCT INFORMATION**

|                                  |                |
|----------------------------------|----------------|
| Product Code                     | 16975          |
| Description                      | 939            |
| ANSI Code                        | 939            |
| Standard Package                 | Case           |
| Standard Package GTIN            | 20043168169756 |
| Standard Package Quantity        | 50             |
| Sales Unit                       | Unit           |
| No Of Items Per Sales Unit       | 1              |
| No Of Items Per Standard Package | 50             |
| UPC                              | 043168169752   |