






GE
Lighting

22525 - 3457

GE S8 - Automotive

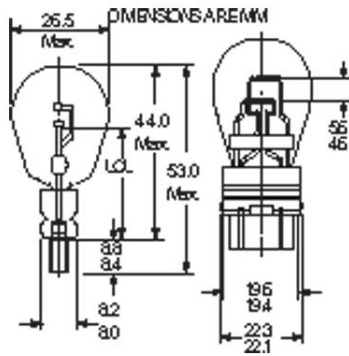

GENERAL CHARACTERISTICS

Lamp Type	Miniature - S Shape
Bulb	S8
Base	Plastic Wedge
Filament	C-6/C-6
Rated Life (MIN)	27.0/8.0 h
Rated Life (Vert)	400.0 / 5000.0 h
Rated Life (NOM)	400.0/5000.0 h
Rated Life (Hor)	27.0 / 8.0 h
Atmosphere	Gas-filled
Primary Application	Turn Signal, Rear;Back up;Cornering;High Mount Stop;License Plate;Parking;Sidemarker, Front;Sidemarker, Rear;Stop;Tail;Turn Signal, Front

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (Vert)	502.0 / 38.0
Initial Lumens (NOM)	502.0 /38.0
Initial Lumens (Hor)	18.59259 / 4.75
Nominal Initial Lumens per Watt (NOM)	18.59259 /4.75
Center Beam Candlepower (CBCP) (NOM)	502.0 /38.0
Mean Spherical Candlepower (MSCP) (NOM)	40.0 /3.0

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	27.0
Voltage (MIN)	400.0
Voltage (NOM)	12.8

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	2.090 in(53.1 mm)
Bulb Diameter (DIA) (NOM)	1.000 in(25.4 mm)
Light Center Length (LCL) (NOM)	1.100 in(27.9 mm)

PRODUCT INFORMATION

Product Code	22525
Description	3457
ANSI Code	3357/3457
Standard Package	Case
Standard Package GTIN	20043168225254
Standard Package Quantity	50
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard	50
Package	
UPC	043168225250