





GE
Lighting

23306 - P21W/BP2

GE S8 - Automotive

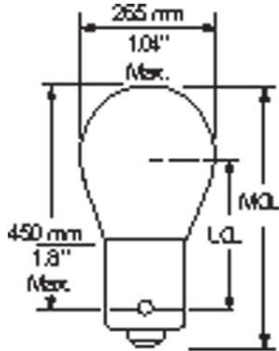

GENERAL CHARACTERISTICS

Lamp Type	Miniature - S Shape
Bulb	S8
Base	Single Contact Bayonet (BA15s)
Filament	C-6
Rated Life (NOM)	250.0 h
Atmosphere	Gas-filled
Primary Application	Under Hood;Back up;Cornering;Daytime Running;Fog/Driving;High Mount Stop;Instrument, General;License Plate;Parking;Sidemarker, Front;Sidemarker, Rear;Step/Courtesy;Stop;Tail;Trunk/Cargo Area;Turn Signal, Front;Turn Signal, Rear

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	460.0
Nominal Initial Lumens per Watt (NOM)	18.4
Mean Spherical Candlepower (MSCP) (NOM)	36.6

ELECTRICAL CHARACTERISTICS

Amps (NOM)	1.85 A
Wattage (NOM)	25.0
Voltage (NOM)	13.5

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	2.000 in(50.8 mm)
Bulb Diameter (DIA) (NOM)	1.000 in(25.4 mm)
Light Center Length (LCL) (NOM)	1.250 in(31.8 mm)

PRODUCT INFORMATION

Product Code	23306
Description	P21W/BP2
Standard Package	Master
Standard Package GTIN	50043168233069
Standard Package Quantity	48
Sales Unit	Blister
No Of Items Per Sales Unit	2
No Of Items Per Standard Package	96
UPC	043168233064