





GE
Lighting

23334 - 1156LL/BP2

GE S8 - Automotive

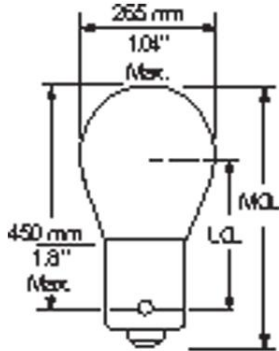

GENERAL CHARACTERISTICS

Lamp Type	Miniature - S Shape
Bulb	S8
Base	Single Contact Bayonet (BA15s)
Filament	C-6
Rated Life (NOM)	2400.0 h
Atmosphere	Gas-filled
Primary Application	Under Hood;Back up;Cornering;Daytime Running;Fog/Driving;High Mount Stop;Instrument, General;License Plate;Parking;Sidemarker, Front;Sidemarker, Rear;Step/Courtesy;Stop;Tail;Trunk/Cargo Area;Turn Signal, Front;Turn Signal, Rear

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	402.0
Nominal Initial Lumens per Watt (NOM)	14.88889
Mean Spherical Candlepower (MSCP) (NOM)	32.0

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	27.0
Voltage (NOM)	12.8

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	2.000 in(50.8 mm)
Bulb Diameter (DIA) (NOM)	1.000 in(25.4 mm)
Light Center Length (LCL) (NOM)	1.250 in(31.8 mm)

PRODUCT INFORMATION

Product Code	23334
Description	1156LL/BP2
ANSI Code	1156
Standard Package	Master
Standard Package GTIN	50043168233342
Standard Package Quantity	48
Sales Unit	Blister
No Of Items Per Sales Unit	2
No Of Items Per Standard Package	96
UPC	043168233347