



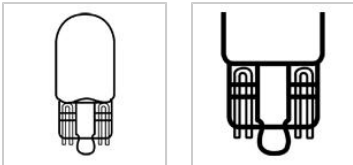

GE  
Lighting

**25962 - 168**

GE T3.25 (T3 1/4) - Automotive

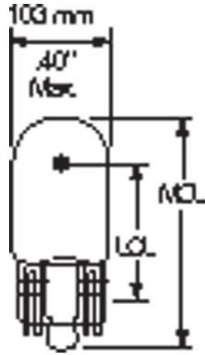

**GENERAL CHARACTERISTICS**

Lamp Type	Miniature - T & TL Shape
Bulb	T3.25 (T3 1/4)
Base	Wedge (W2.1x9.5d)
Filament	C-2F
Rated Life (NOM)	1500.0 h
Atmosphere	Vacuum
Primary Application	Under Hood;Ash tray;Auto Transmission Indicator;Back up;Brake Warning;Check Engine;Clock;Directional Signal Indicator;Dome;Glove Box;Hi-Beam Indicator;High Mount Stop;Ignition Switch;Instrument, General;License Plate;Map;Parking;Radio dial;Seat Belt Warning;Sidemarker, Front;Sidemarker, Rear;Step/Courtesy;Stop;Tail;Trunk/Cargo Area;Turn Signal, Front;Turn Signal, Rear

**PHOTOMETRIC CHARACTERISTICS**

Initial Lumens (NOM)	38.0
Nominal Initial Lumens per Watt (NOM)	7.6
Mean Spherical Candlepower (MSCP) (NOM)	3.0

**ELECTRICAL CHARACTERISTICS**

Wattage (NOM)	5.0
Voltage (NOM)	14.0

**DIMENSIONS**

Maximum Overall Length (MOL) (NOM)	1.060 in(26.9 mm)
Bulb Diameter (DIA) (NOM)	0.406 in(10.3 mm)
Light Center Length (LCL) (NOM)	0.560 in(14.2 mm)

**PRODUCT INFORMATION**

Product Code	25962
Description	168
ANSI Code	168
Standard Package	Case
Standard Package GTIN	00043168259620
Standard Package Quantity	50
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	50
UPC	043168961691