



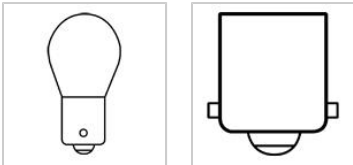

GE
Lighting

26838 - 1073

GE S8 - Automotive; Low Voltage

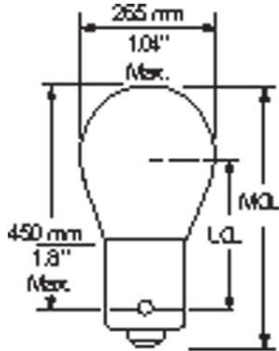

GENERAL CHARACTERISTICS

| | |
|---------------------|---|
| Lamp Type | Miniature - S Shape |
| Bulb | S8 |
| Base | Single Contact Bayonet (BA15s) |
| Filament | C-6 |
| Rated Life (NOM) | 200.0 h |
| Atmosphere | Gas-filled |
| Primary Application | Low Voltage; Back up; High Mount Stop; Parking; Stop; Tail; Turn Signal, Front; Turn Signal, Rear |

PHOTOMETRIC CHARACTERISTICS

| | |
|---|----------|
| Initial Lumens (NOM) | 402.0 |
| Nominal Initial Lumens per Watt (NOM) | 17.47826 |
| Mean Spherical Candlepower (MSCP) (NOM) | 32.0 |

ELECTRICAL CHARACTERISTICS

| | |
|---------------|------|
| Wattage (NOM) | 23.0 |
| Voltage (NOM) | 12.8 |

DIMENSIONS

| | |
|------------------------------------|-------------------|
| Maximum Overall Length (MOL) (NOM) | 2.000 in(50.8 mm) |
| Bulb Diameter (DIA) (NOM) | 1.000 in(25.4 mm) |
| Light Center Length (LCL) (NOM) | 1.250 in(31.8 mm) |

PRODUCT INFORMATION

| | |
|----------------------------------|----------------|
| Product Code | 26838 |
| Description | 1073 |
| ANSI Code | 1073 |
| Standard Package | Case |
| Standard Package GTIN | 20043168268381 |
| Standard Package Quantity | 50 |
| Sales Unit | Unit |
| No Of Items Per Sales Unit | 1 |
| No Of Items Per Standard Package | 50 |
| UPC | 043168268387 |