





GE
Lighting

27529 - 1662

GE S8 - Aircraft; Low Voltage

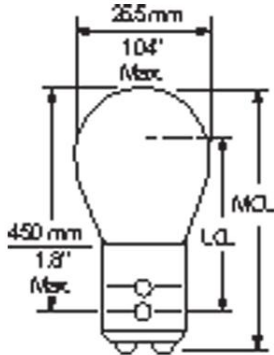

GENERAL CHARACTERISTICS

Lamp Type	Miniature - S Shape
Bulb	S8
Base	Double Contact Index (BAY15d)
Filament	CC-6/C-2V
Rated Life (MIN)	28.0/9.5 h
Rated Life (Vert)	400.0 / 1000.0 h
Rated Life (NOM)	400.0/1000.0 h
Rated Life (Hor)	28.0 / 9.5 h
Atmosphere	Gas-filled
Primary Application	Aircraft;Low Voltage

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (Vert)	402.0 / 75.0
Initial Lumens (NOM)	402.0 /75.0
Initial Lumens (Hor)	14.35714 / 7.894737
Nominal Initial Lumens per Watt (NOM)	14.35714 /7.894737
Center Beam Candlepower (CBCP) (NOM)	402.0 /75.0
Mean Spherical Candlepower (MSCP) (NOM)	32.0 /6.0

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	28.0
Voltage (MIN)	400.0
Voltage (NOM)	28.0

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	2.000 in(50.8 mm)
Bulb Diameter (DIA) (NOM)	1.000 in(25.4 mm)
Light Center Length (LCL) (NOM)	1.250 in(31.8 mm)

PRODUCT INFORMATION

Product Code	27529
Description	1662
ANSI Code	1662
Standard Package	Case
Standard Package GTIN	00043168275293
Standard Package Quantity	10
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	10
UPC	043168963084