





GE
Lighting

27561 - P21/4W/BP2

GE S8 - Automotive

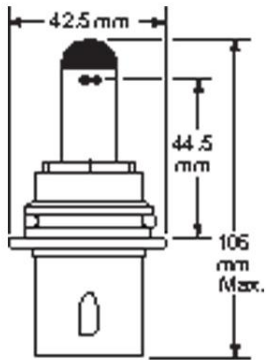

CAUTIONS & WARNINGS

Caution

- Risk of Burn
 - Allow lamp/fixture to cool before handling.

Warning

- Pressurized lamp--unexpected rupture may cause injury, fire, or property damage
 - Avoid direct water/liquid contact.
 - Dispose of lamp in a closed container.
 - Do not exceed rated voltage.
 - Do not turn on lamp until fully installed.
 - Do not use lamp if outer glass is scratched or broken.
 - Keep children away.
 - Use eye protection when handling lamp.
 - Use in enclosed fixture rated for this product.
 - Use protective screen when handling.

GENERAL CHARACTERISTICS

Lamp Type	Miniature - S Shape
Bulb	S8
Base	Double Contact Index (BAY15d)
Filament	C-6/C-6
Rated Life (NOM)	100.0/100.01 h
Atmosphere	Gas-filled
Primary Application	Turn Signal, Rear;Back up;Cornering;High Mount Stop;License Plate;Parking;Sidemarker, Front;Sidemarker, Rear;Stop;Tail;Turn Signal, Front

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	440.0 /15.0
Nominal Initial Lumens per Watt (NOM)	17.6 /3.75
Mean Spherical Candlepower (MSCP) (NOM)	35.0 /1.19

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	25.0
Voltage (NOM)	13.5

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	2.000 in(50.8 mm)
Bulb Diameter (DIA) (NOM)	1.000 in(25.4 mm)
Light Center Length (LCL) (NOM)	1.250 in(31.8 mm)

PRODUCT INFORMATION

Product Code	27561
Description	P21/4W/BP2
Standard Package	Master
Standard Package GTIN	50043168275618
Standard Package Quantity	48
Sales Unit	B blister
No Of Items Per Sales Unit	2
No Of Items Per Standard Package	96
UPC	043168275613