



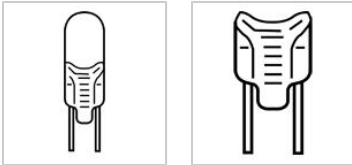

GE
Lighting

43762 - 785

GE T2.25 (T2 1/4) - Low Voltage; Emergency Building; Emergency Building Light

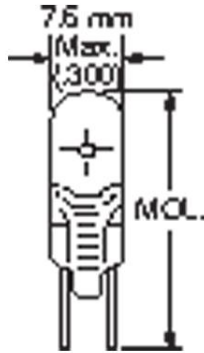

CAUTIONS & WARNINGS

Caution

- Risk of Burn
 - Allow lamp/fixture to cool before handling.

Warning

- Pressurized lamp--unexpected rupture may cause injury, fire, or property damage
 - Avoid direct water/liquid contact.
 - Dispose of lamp in a closed container.
 - Do not exceed rated voltage.
 - Do not turn on lamp until fully installed.
 - Do not use lamp if outer glass is scratched or broken.
 - Keep children away.
 - Use eye protection when handling lamp.
 - Use in enclosed fixture rated for this product.
 - Use protective screen when handling.

NOTES

- .028" metal pins spaced 44mm (.157") apart. GE's two-pin lamps might not be compatible with all G-4 sockets since many sockets do not provide clearance for the exhaust tip.

GENERAL CHARACTERISTICS

Lamp Type	Miniature - T & TL Shape
Bulb	T2.25 (T2 1/4)
Base	2-Pin (G4)
Filament	C-6
Rated Life (NOM)	50.0 h
Bulb Material	Hard glass
Atmosphere	Gas-filled
Primary Application	Emergency Building;Low Voltage

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	163.0
Nominal Initial Lumens per Watt (NOM)	20.375
Mean Spherical Candlepower (MSCP) (NOM)	13.0

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	8.0
Voltage (NOM)	6.0

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	1.000 in(25.4 mm)
Bulb Diameter (DIA) (NOM)	0.281 in(7.1 mm)
Light Center Length (LCL) (NOM)	0.770 in(19.6 mm)

PRODUCT INFORMATION

Product Code	43762
Description	785
ANSI Code	785
Standard Package	Case
Standard Package GTIN	20043168437626
Standard Package Quantity	10
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	10
UPC	043168437622