



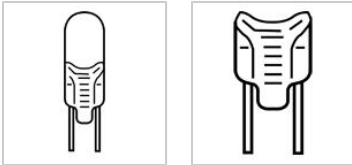

GE  
Lighting

**44500 - 783**

GE T2.25 (T2 1/4) - Low Voltage; Emergency Building; Emergency Building Light

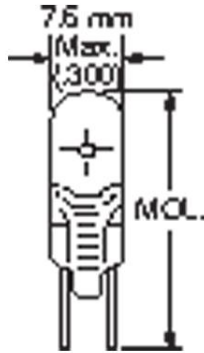

**CAUTIONS & WARNINGS**

**Caution**

- Risk of Burn
  - Allow lamp/fixture to cool before handling.

**Warning**

- Pressurized lamp--unexpected rupture may cause injury, fire, or property damage
  - Avoid direct water/liquid contact.
  - Dispose of lamp in a closed container.
  - Do not exceed rated voltage.
  - Do not turn on lamp until fully installed.
  - Do not use lamp if outer glass is scratched or broken.
  - Keep children away.
  - Use eye protection when handling lamp.
  - Use in enclosed fixture rated for this product.
  - Use protective screen when handling.

**NOTES**

- .028" metal pins spaced 44mm (.157") apart. GE's two-pin lamps might not be compatible with all G-4 sockets since many sockets do not provide clearance for the exhaust tip.

**GENERAL CHARACTERISTICS**

Lamp Type	Miniature - T & TL Shape
Bulb	T2.25 (T2 1/4)
Base	2-Pin (G4)
Filament	C-6
Rated Life (NOM)	50.0 h
Bulb Material	Hard glass
Atmosphere	Gas-filled
Primary Application	Emergency Building;Low Voltage

**PHOTOMETRIC CHARACTERISTICS**

Initial Lumens (NOM)	276.0
Nominal Initial Lumens per Watt (NOM)	23.0
Mean Spherical Candlepower (MSCP) (NOM)	22.0

**ELECTRICAL CHARACTERISTICS**

Wattage (NOM)	12.0
Voltage (NOM)	12.0

**DIMENSIONS**

Maximum Overall Length (MOL) (NOM)	1.000 in(25.4 mm)
Bulb Diameter (DIA) (NOM)	0.281 in(7.1 mm)
Light Center Length (LCL) (NOM)	0.770 in(19.6 mm)

**PRODUCT INFORMATION**

Product Code	44500
Description	783
ANSI Code	783
Standard Package	Case
Standard Package GTIN	20043168445003
Standard Package Quantity	10
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	10
UPC	043168445009