





GE  
Lighting

## 47802 - 1141LL/BP2

GE S8 - Automotive

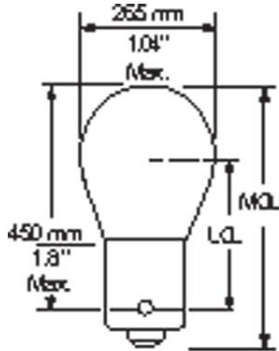

### GENERAL CHARACTERISTICS

Lamp Type	Miniature - S Shape
Bulb	S8
Base	Single Contact Bayonet (BA15s)
Filament	C-6
Rated Life (MIN)	18.0 h
Rated Life (Vert)	2000.0 h
Rated Life (NOM)	2000.0 h
Rated Life (Hor)	18.0 h
Atmosphere	Gas-filled
Primary Application	Turn Signal, Rear; Back up; Cornering; High Mount Stop; Instrument, General; License Plate; Map; Step/ Courtesy; Stop; Turn Signal, Front

### PHOTOMETRIC CHARACTERISTICS

Initial Lumens (Vert)	264.0
Initial Lumens (NOM)	264.0
Initial Lumens (Hor)	14.66667
Nominal Initial Lumens per Watt (NOM)	14.66667
Center Beam Candlepower (CBCP) (NOM)	264.0
Mean Spherical Candlepower (MSCP) (NOM)	21.0

### ELECTRICAL CHARACTERISTICS

Wattage (NOM)	18.0
Voltage (MIN)	2000.0
Voltage (NOM)	12.8

### DIMENSIONS

Maximum Overall Length (MOL) (NOM)	2.000 in(50.8 mm)
Bulb Diameter (DIA) (NOM)	1.000 in(25.4 mm)
Light Center Length (LCL) (NOM)	1.250 in(31.8 mm)

### PRODUCT INFORMATION

Product Code	47802
Description	1141LL/BP2
ANSI Code	1141
Standard Package	Master
Standard Package GTIN	50043168478026
Standard Package Quantity	48
Sales Unit	Blister
No Of Items Per Sales Unit	2
No Of Items Per Standard Package	96
UPC	043168478021