





GE
Lighting

16771 - 40G25/H/CL

GE halogen 40 watt G25 1-pack

- GE halogen bulbs deliver crisp, white light. This unsurpassed light quality is ideal for adding depth, drama and interest to any room. Plus, these bulbs last longer than regular incandescent bulbs. GE halogen globes' decorative round shape is perfect for illuminating pendant and vanity fixtures
- Edison™ halogen bulbs provide a brighter, crisper light that makes your home look its best
- That's why professionals choose Edison for exceptional results and longer bulb life.
- Showcase the beauty of your home with the highest quality of light.
- Estimated yearly energy costs \$4.82 based on 3 hours per day \$0.11 per kWh
- G25 globe with medium base for use in vanity strips
- Lasts 2.1 years based on 3 hours per day usage

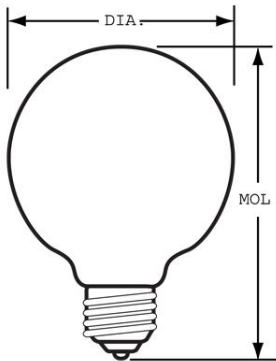

GENERAL CHARACTERISTICS

Lamp Type	Halogen - Decorative
Bulb	G25
Base	Medium Screw (E26)
Filament	CC-8
Rated Life (NOM)	2250.0 h
Life in Years (NOM)	2.1
Primary Application	Globe

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	510.0 /520.0
Color Temperature (NOM)	2700.0 K
Nominal Initial Lumens per Watt (NOM)	12.75

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	40.0
Voltage (NOM)	120.0
Estimated Energy Cost per Year (NOM)	4.82

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	4.448 in(113.0 mm)
Bulb Diameter (DIA) (NOM)	3.125 in(79.4 mm)
Light Center Length (LCL) (NOM)	2.559 in(65.0 mm)

PRODUCT INFORMATION

Product Code	16771
Description	40G25/H/CL
Standard Package	Case
Standard Package GTIN	10043168167717
Standard Package Quantity	6
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	6
UPC	043168167710

CAUTIONS & WARNINGS

Caution

- Lamp may shatter and cause injury if broken
 - Dispose of lamp in a closed container.
 - Do not use lamp if outer glass is scratched or broken.

Warning

- Risk of Burn
 - Allow lamp to cool before handling.
- A damaged lamp emits UV radiation which may cause eye/skin injury
 - Turn power off if glass bulb is broken, even if bulb continues to light. Remove and dispose of lamp.
- Pressurized lamp--unexpected rupture may cause injury, fire, or property damage
 - Do not exceed rated voltage.
 - Do not use lamp if outer glass is scratched or broken, even if bulb continues to light. Turn power off, remove and dispose.
- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.
 - Turn power off if glass bulb is broken, even if bulb continues to light. Remove and dispose of lamp.
- Risk of Fire
 - In table lamp, use only with shade.
 - Keep combustible materials away from lamp.
 - Use in fixture rated for this product.

*Eighteen month life based on rated life at 4 hours/day.